




NATURE POWER 800 WATT POWER INVERTER

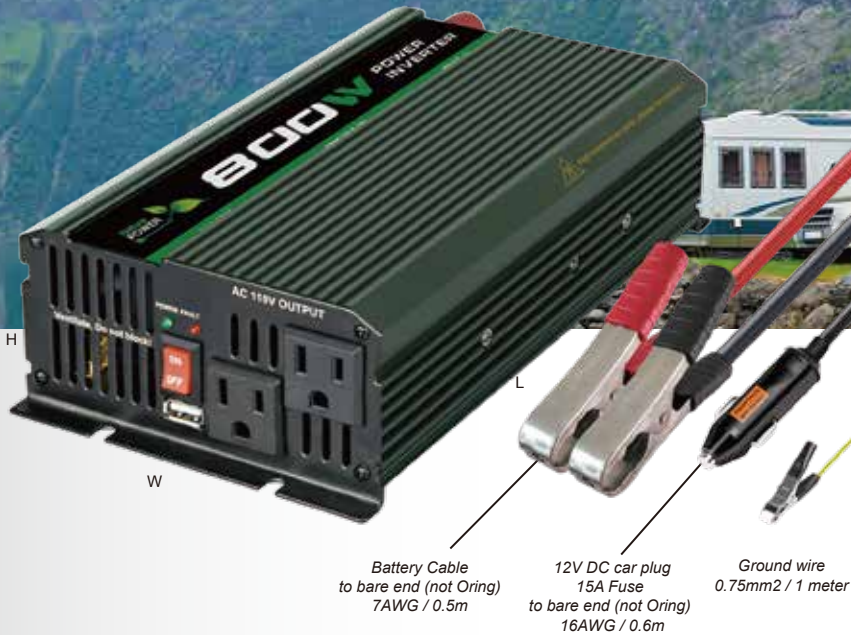

Features

Convert battery power to household AC power

- 2 x AC Outlets and USB Charger Allow You to Run Multiple Devices at The Same Time
- Runs Home Appliance, TVs , Power Tools and More
- 800 Watts Continuous Output, 1600 Watts Surge
- Comes With Battery Connect Cables
- Compact Size



SPECIFICATIONS

AC OUTPUT

Power: 800W (Continuous), 1600W(Peak)

Voltage: 110±10% Vac

Frequency: 60±3 Hz

Waveform: Modified sinewave

AC Outlet: 2 x 3Prong AC outlet

DC OUTPUT

USB: 1 x 5V/2.1A

DC INPUT

Voltage (nominal): 12.8-13.2Vdc

Operation Range: 11.0-15.0Vdc

Material: ABS, Stell, Aluminum

PROTECTION:

Input Undervoltage Warning: 10.2-10.8Vdc

Input Undervoltage Shutdown: 9.2-9.8Vdc

Input Overvoltage Shutdown: 15-16Vdc

Overload Shutdown: Yes

Output Short circuit Protection: Yes

Over Temperature Shutdown: Yes

SHIPPING DETAILS

Item Number: 37800

UPC Code: 839290003329

Original: China

Product Dims LxWxH: 9 x 5.2 x 2.5 in

Color box Dims LxWxH: 10.4 x 6.4 x 4.2 in

Product Weight: 4 lbs with package

3.5 lbs without package

Master Quantity: 10

Master Dimensions: 22 x 12 x 13.8 in

Master Weight: 24.9 lbs



1-800-588-0590

www.naturepowerproducts.com



fb.me/NaturePowerProducts

