


## **30 AMP SOLAR CHARGE CONTROLLER**



## **Features**

- Pre-set charging modes available for most common battery types
- Automatic recognition of 12V/24V battery system.
- Provides multiple load control mode options.
- Industrial grade design with reverse polarity protection.
- 5V 1A USB outlet provides charging for mobile devices.
- APP ChargePro for mobile phone monitoring and operation.
- You can search "ChargePro" at IOS APP Store and Google Play Store.

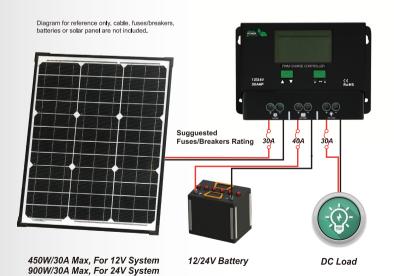





**DC** Input

Max solar Input Voltage: <55V

Input Current: 30A(Max)

Solar Panel Rating (Max): 12V/450W 24V/900W

**Charge Controller Output to Battery** 

Battery Rating: 12V / 24V (Auto Detect)

Battery Type: SEL / GEL / FLD / Li / Use

Charge Voltage Range: 9~15V, Default:14.2V

Float Voltage Range: 9~15V, Default:13.8V

**DC** Load

DC Load Current: 30A (Max)

**PROTECTION:** 

PV Reverse Polarity: Protected

Boost Charge Recovery voltage: 13.2V

Over-Discharge Recovery Voltage: 12.6V

## SHIPPING DETAILS

Item Number: 60032

UPC Code: 839290006108

Country of Origin: China

Product Dims LxWxH: 6.3 x 2.3 x 4.3 in

Color box Dims LxWxH: 6.26 x 3.2 x 8 in

Product Weight: 1.4 lbs with package

1.1 lbs without package

Master Quantity: -

Master Dimensions: - in

Master Weight: - Ibs